




Mechanical Vibration I (12)

Department of Mechanical and
Control Engineering

Hiroshi Yamaura

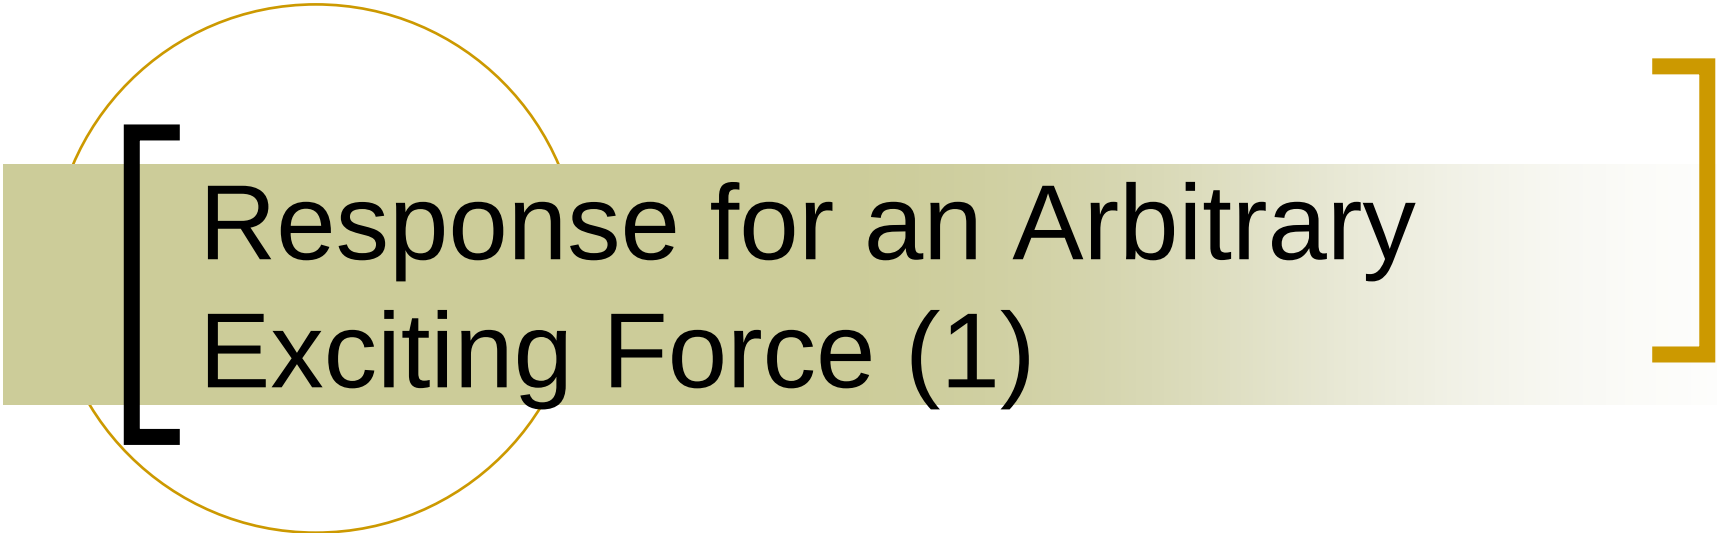

Response for an Arbitrary Exciting Force (1)

Response for a harmonic excitation with one frequency component

Complex Excitation Force

Response

$$f(t) = F_1 \exp(i\omega_1 t) \longrightarrow x(t) = F_1 H(i\omega_1) \exp(i\omega_1 t)$$

Harmonic Excitation Force with one frequency component

$$f(t) = F_1 \cos(\omega_1 t) = F_1 \operatorname{Re}\{\exp(i\omega_1 t)\}$$



$$x(t) = F_1 \operatorname{Re}\{H(i\omega_1) \exp(i\omega_1 t)\}$$

$$= F_1 [\operatorname{Re}\{H(i\omega_1)\} \cos(\omega_1 t) - \operatorname{Im}\{H(i\omega_1)\} \sin(\omega_1 t)]$$

Response for a harmonic excitation with two frequency component

Harmonic Excitation Force with two frequency component

$$f(t) = F_1 \cos(\omega_1 t) + F_2 \sin(\omega_2 t)$$



$$\begin{aligned} x(t) &= F_1 \operatorname{Re}\{H(i\omega_1)\exp(i\omega_1 t)\} + F_2 \operatorname{Im}\{H(i\omega_2)\exp(i\omega_2 t)\} \\ &= F_1 [\operatorname{Re}\{H(i\omega_1)\}\cos(\omega_1 t) - \operatorname{Im}\{H(i\omega_1)\}\sin(\omega_1 t)] \\ &\quad + F_2 [\operatorname{Re}\{H(i\omega_2)\}\sin(\omega_2 t) + \operatorname{Im}\{H(i\omega_2)\}\cos(\omega_2 t)] \end{aligned}$$

Response for a periodic excitation with a period of T (1)

Periodic Excitation Force with a period of T

$$f(t) = \frac{a_0}{2} + \sum_{n=1}^{\infty} \left[a_n \cos\left(\frac{2n\pi}{T}t\right) + b_n \sin\left(\frac{2n\pi}{T}t\right) \right]$$

where

$$a_0 = \frac{2}{T} \int_{-T/2}^{T/2} f(t) dt, \quad a_n = \frac{2}{T} \int_{-T/2}^{T/2} f(t) \cos\left(\frac{2n\pi}{T}t\right) dt$$

$$b_n = \frac{2}{T} \int_{-T/2}^{T/2} f(t) \sin\left(\frac{2n\pi}{T}t\right) dt$$

Response for a periodic excitation with a period of T (2)

Response for a periodic excitation (1)

$$\begin{aligned} x(t) = & \frac{a_0}{2} H(0) \\ & + \sum_{n=1}^{\infty} \left[a_n \operatorname{Re} \left\{ H \left(i \frac{2n\pi}{T} \right) \right\} + b_n \operatorname{Im} \left\{ H \left(i \frac{2n\pi}{T} \right) \right\} \right] \cos \left(\frac{2n\pi}{T} t \right) \\ & + \left[-a_n \operatorname{Im} \left\{ H \left(i \frac{2n\pi}{T} \right) \right\} + b_n \operatorname{Re} \left\{ H \left(i \frac{2n\pi}{T} \right) \right\} \right] \sin \left(\frac{2n\pi}{T} t \right) \end{aligned}$$

Response for a periodic excitation with a period of T (3)

Response for a periodic excitation (2)

$$x(t) = \sum_{n=-\infty}^{\infty} c_n H\left(i \frac{2n\pi}{T}\right) \exp\left(i \frac{2n\pi}{T} t\right)$$

where

$$c_0 = \frac{a_0}{2}, \quad c_n = \begin{cases} \frac{a_n - ib_n}{2}, & n > 0 \\ \frac{a_{-n} + ib_{-n}}{2}, & n < 0 \end{cases}$$